


# KELLY SO4

## Suspension | Large Sphere

220-240V

 4x max 46W eco Classic A60 (E27)

 4x max 23W CFL compact (E27)

 4x max Classic A60 LED (E27)

L max cm 12

L max cm 12

Ita-Eng

2016.07.12



### ASSEMBLAGGIO SFERA

- 1) Dopo aver aperto la scatola contenente la sfera traforata [M] togliere il diffusore in vetro [D] e riporlo in un posto sicuro (Fig. 1)
- 2) Estrarre dalla scatola il tampone in polistirolo ed appoggiarlo rovescio su di una superficie piana per poterlo poi usare come base d'appoggio per la lampada (Fig. 2)
- 3) Estrarre la sfera traforata [M] dall'imballo ed appoggiarlo sul tampone di polistirolo con la parte piatta rivolta verso l'alto.
- 4) Estrarre dalla seconda scatola la parte elettrica della lampada. Rimuovere la vite [Y] e separare la cupola [Q] dalla struttura [T]
- 5) Inserire le lampadine nei portalampade.
- 6) Appoggiare il vetro [D] nell'apposita sede [S] sul diffusore [M] ed inserire l'anello [H] attorno al vetro.
- 7) Posizionare la struttura portalampade [T] sulla sfera traforata [M] e bloccarla avvitando i finalini [R]. Avvitare i grani filettati [P] per bloccare il vetro [D]
- 8) Riposizionare la cupola [Q] sulla sua sede.  
Nota: nel caso la cupola [Q] non rimanga correttamente distanziata dalla sfera si può agire regolando le viti in plastica [X]
- 9) Bloccare infine la cupola riavvitando la vite [Y]

### ASSEMBLY SPHERE

- 1) Open the box that contains the perforated shade [M] and remove the glass diffuser [D]: put it aside on a safe place (Fig. 1)
- 2) Remove the upper half of the polystyrene packaging from the box and place it upside down on a flat surface to use it as a base stand for the fixture (Fig. 2)
- 3) Remove the perforated sphere [M] from the box and place it on top of the polystyrene packaging with the flat side facing upwards.
- 4) Open the second box and take out the electric part of the fixture. Undo the screw [Y] and slide up the dome [Q] from the structure [T]
- 5) Install the light bulbs into the lamp holders.
- 6) Place the glass diffuser [D] on top [S] of the perforated shade [M] and insert the plastic ring [H]
- 7) Place the lamp holders frame [T] on top of the perforated shade and secure it in place with the nuts [R]. Tighten the grub screws [P] to secure the glass diffuser [D]
- 8) Slide the dome [Q] in place.  
Note: if the dome [Q] does not remain properly spaced from the sphere you can regulate the plastic screws [X]
- 9) Secure the dome with the screw [Y]

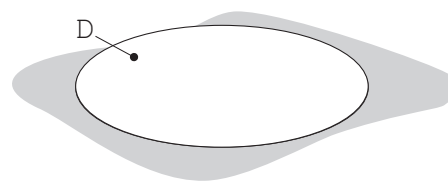


Fig.1

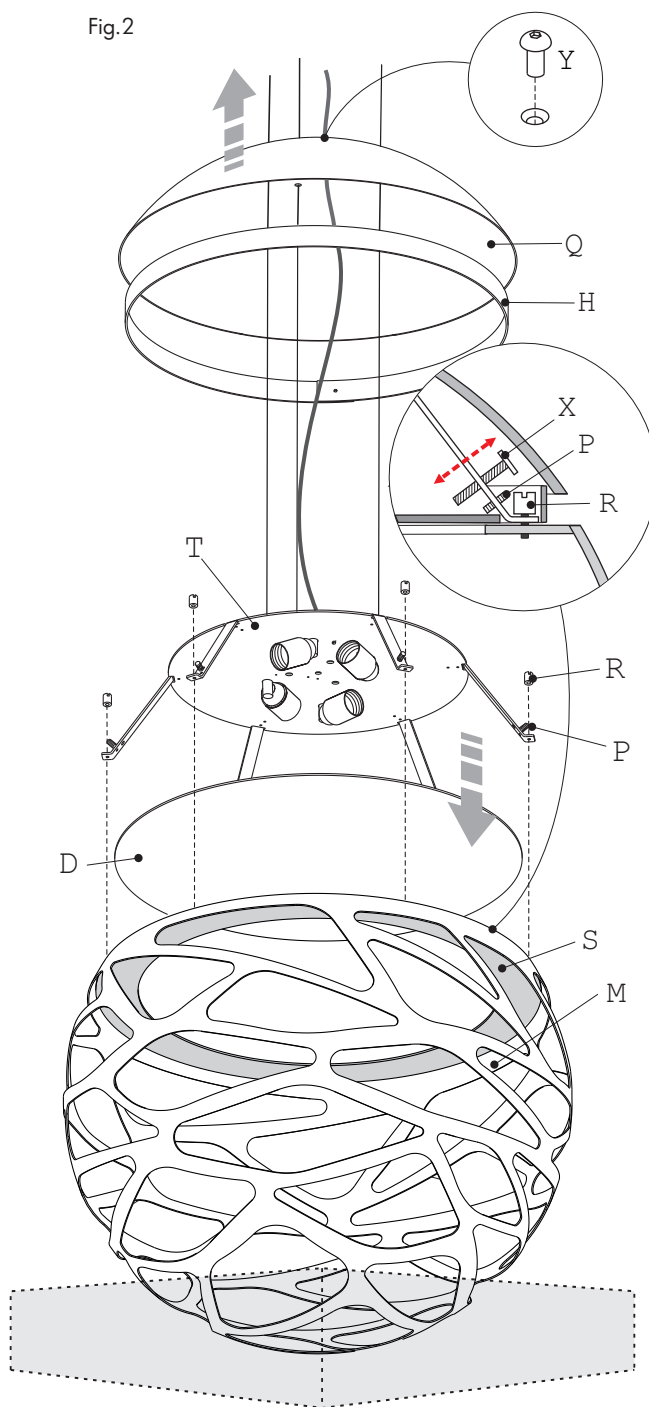


Fig.2

Studio Italia Design garantisce i suoi prodotti essere privi da difetti di materiale e di lavorazione per la durata di un anno dalla consegna. Durante tale periodo Studio Italia Design riparerà o sostituirà, a sua discrezione, i prodotti che hanno dato prova di difetto. Questa garanzia non è applicata a danni risultanti dall'incidente, alterazione, manomissione, abuso o negligenza. Ogni modifica può compromettere la sicurezza rendendo l'apparecchio pericoloso. Studio Italia Design declina ogni responsabilità per i prodotti modificati. L'apparecchio non deve essere installato in posizioni o in applicazioni diverse da quelle indicate nelle istruzioni di montaggio.

Studio Italia Design warrants its to be free from defects in materials and workmanship for a period of one year date of delivery. During this warranty period Studio Italia Design will repair or replace, at its option, product that are proven to be defective. This warranty does not apply to damages resulting from accidental, alteration, tampering, misuse, negligence or abuse. Any modification may compromise safety causing the product to become dangerous. Studio Italia Design declines all responsibility for products that are modified. Fixture must not be installed in any position or used in a different way than shown in his instructions.

**Conservare le istruzioni per una manutenzione futura. L'apparecchio deve essere installato da personale qualificato**  
**Keep these instructions for future reference. To be installed by a qualified licensed electrician only**



STUDIO ITALIA DESIGN | Via Pialoi, 32, 30020, Marcon, Venezia, ITALY | [www.studioitaliadesign.com](http://www.studioitaliadesign.com) | [info@studioitaliadesign.com](mailto:info@studioitaliadesign.com)

STUDIO  
ITALIA DESIGN

# KELLY SO4

## Suspension | Large Sphere

Disinserire la tensione prima di operare sull'apparecchio


### ISTRUZIONI DI MONTAGGIO

- 1) Svitare il grano [E] e rimuovere il coperchio [C] dalla scatola a soffitto [A] (vedi Fig.3 e Fig.7)
- 2) Fissare al soffitto la scatola [A] attraverso i fori asolati [G]
- 3) Regolare l'altezza della lampada agendo sulle tre funi d'acciaio [L] regolando i registri [F] (vedi Fig.4 per l'uso dei registri).
- 4) Regolare la lunghezza del cavo elettrico attraverso il bloccacavo a ponte [P] all'interno della scatola a soffitto [A] (vedi particolare Fig.5)
- 5) Eseguire il collegamento elettrico ai morsetti [B](Fig.6)
- 6) Riposizionare il coperchio [C] sulla scatola a soffitto [A] bloccandolo con il grano [E]

Before installing turn off the power to the electrical box

### MOUNTING INSTRUCTIONS

- 1) Undo the grub screw [E] and slide down the ceiling rose cap [C] (see Fig.3 and Fig.7)
- 2) Fix the ceiling plate [A] to the ceiling using appropriate fixings [G]
- 3) Adjust the length of the suspension wires [L] using the wire grips [F] (see Fig.4 for further instructions).
- 4) Adjust the length of the power cable using the cable grip [P] inside the ceiling plate (see detail on Fig.5)
- 5) Make the connection of the power supply to the terminal blocks [B] (Fig.6)
- 6) Slide the cap [C] over the ceiling plate and block it screwing the grub screw [E]

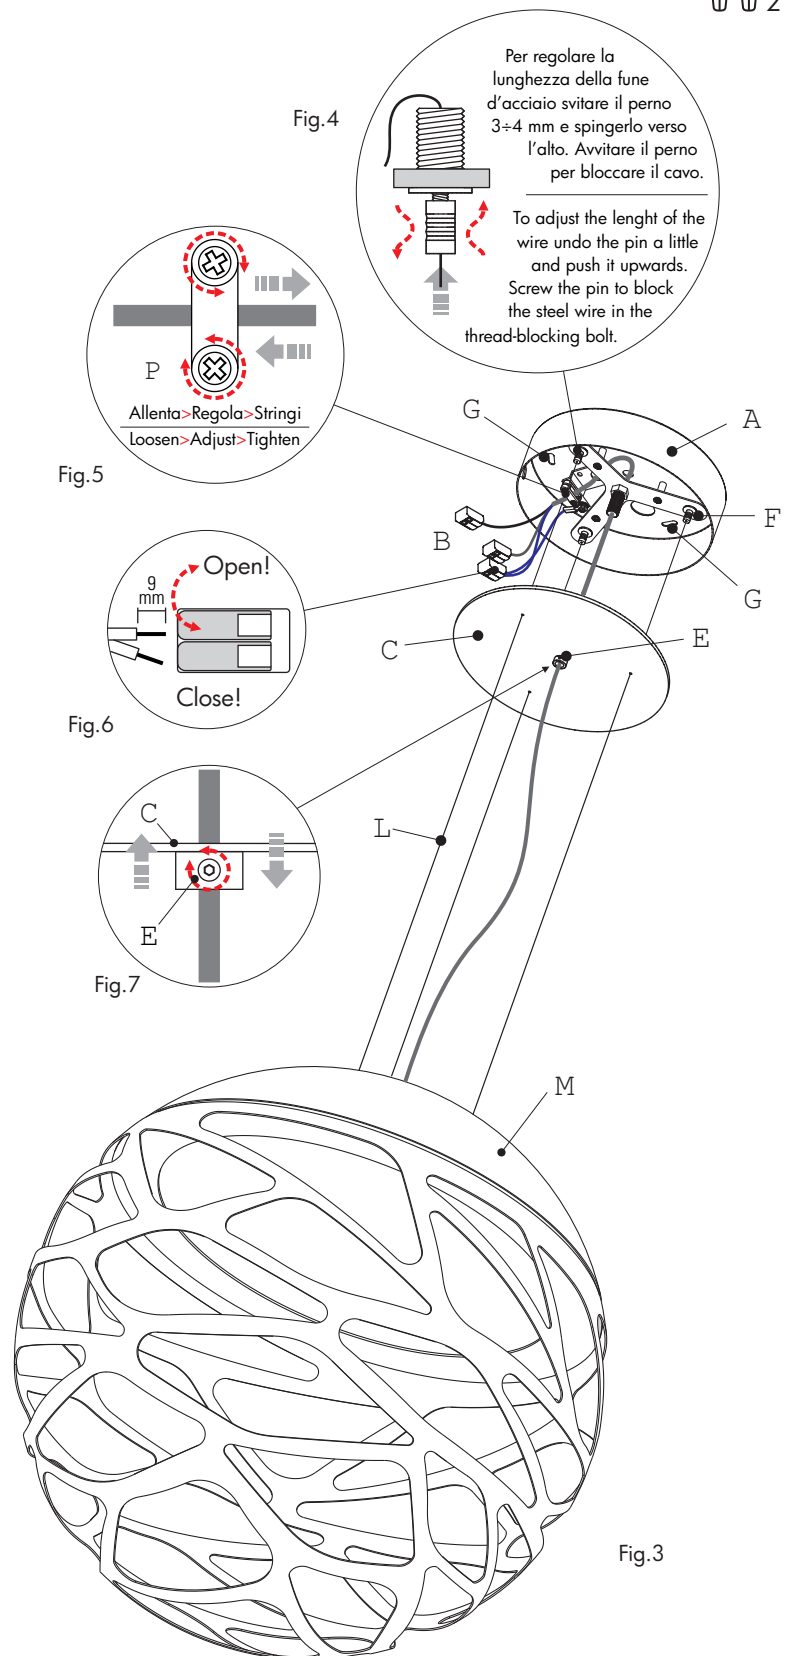

Studio Italia Design garantisce i suoi prodotti essere privi da difetti di materiale e di lavorazione per la durata di un anno dalla consegna. Durante tale periodo Studio Italia Design riparerà o sostituirà, a sua discrezione, i prodotti che hanno dato prova di difetto. Questa garanzia non è applicata a danni risultanti dall'incidente, alterazione, manomissione, abuso o negligenza. Ogni modifica può compromettere la sicurezza rendendo l'apparecchio pericoloso. Studio Italia Design declina ogni responsabilità per i prodotti modificati. L'apparecchio non deve essere installato in posizioni o in applicazioni diverse da quelle indicate nelle istruzioni di montaggio.

Studio Italia Design warrants its to be free from defects in materials and workmanship for a period of one year date of delivery. During this warranty period Studio Italia Design will repair or replace, at its option, product that are proven to be defective. This warranty does not apply to damages resulting from accidental, alteration, tampering, misuse, negligence or abuse. Any modification may compromise safety causing the product to become dangerous. Studio Italia Design declines all responsibility for products that are modified. Fixture must not be installed in any position or used in a different way than shown in his instructions.

**Conservare le istruzioni per una manutenzione futura. L'apparecchio deve essere installato da personale qualificato**  
**Keep these instructions for future reference. To be installed by a qualified licensed electrician only**